

QUICK CONNECT GUIDE



DIRECTOR



For a complete guide of instructions, see the manual located on the Manual CD that was shipped with your system.

www.mfdigital.com



Software Manual is located on Manuals CD packaged with your system.

CARTON CONTENTS

Director Series Loader

Power Cable

LAN Connection Guide

LAN Cable


Quick Connect Guide

User's Manual CD

System Firmware CD

Windows XP CD


Mounting & Connecting Your PicoJet 6000 Printer with the MF Digital Director Series.

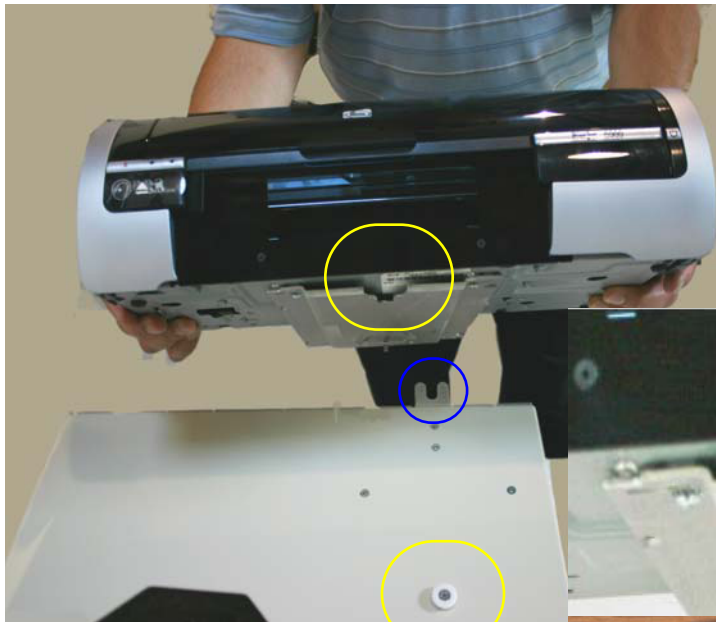

K
E
Y


Front

Rear

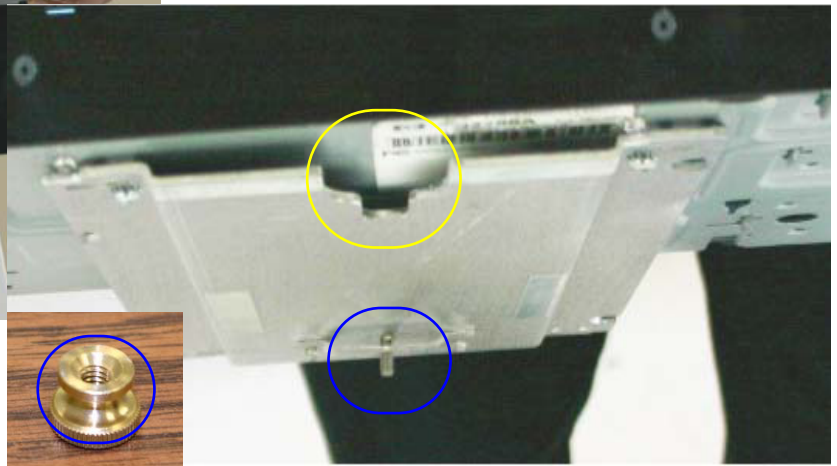

1. Locate the front of the mounting plate as indicated by the yellow circle to the right.
2. Slip the groove of the mounting plate around the white plastic knob. See picture above (yellow circle).
3. The threaded screw located at the rear of the mounting plate will line up with the "U" shaped housing located on the rear of the Director Series Unit. See picture above (blue circle).
4. After mounting the Printer, be sure to push the printer all the way forward then use the Thumbscrew to secure the printer to the Director Series Unit.
5. To wire your printer to the Director Series Unit, please follow the wiring diagram to the right.


PicoJet 6000
Printer

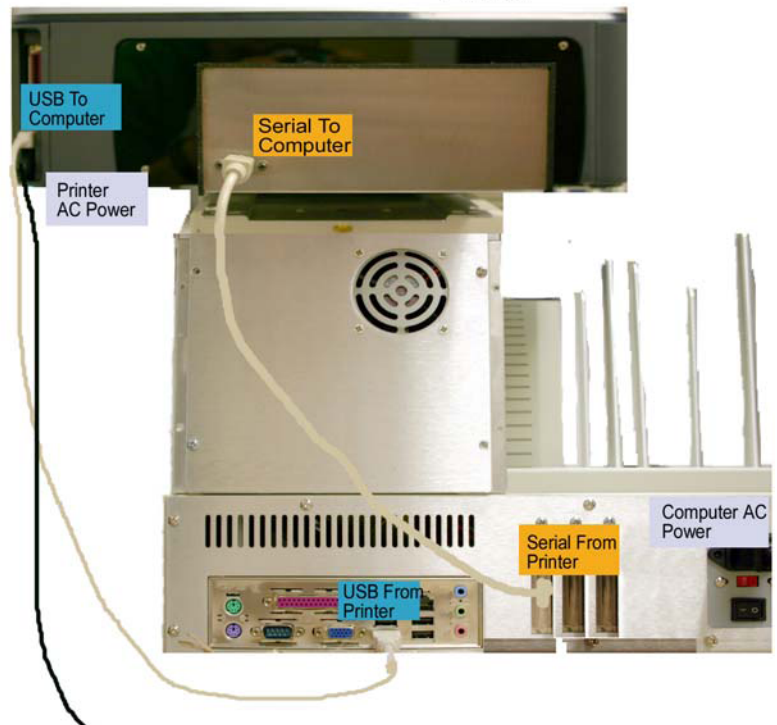


Mounting & Connecting Your Prism Plus Printer with the MF Digital Director Series.



K
E
Y

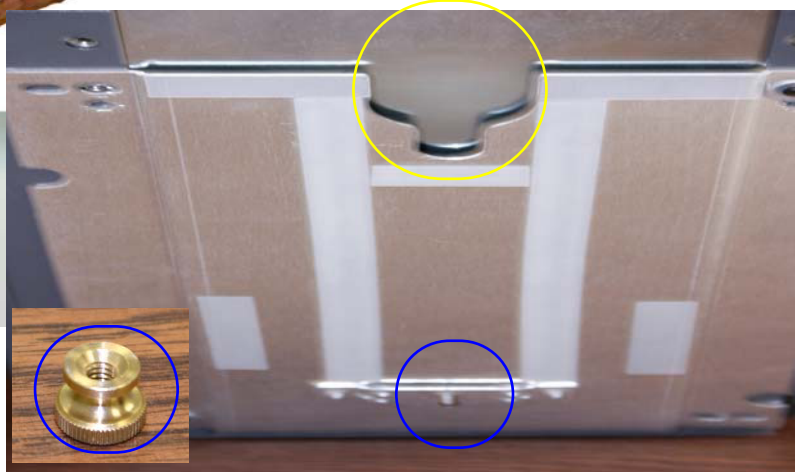

1. Locate the front of the mounting plate as indicated by the yellow circle to the right.
2. Slip the groove of the mounting plate around the white plastic knob. See picture above (yellow circle).
3. The threaded screw located at the rear of the mounting plate will line up with the "U" shaped housing located on the rear of the Director Series Unit. See picture above (blue circle).
4. After mounting the Printer, be sure to push the printer all the way forward then use the Thumbscrew to secure the printer to the Director Series Unit.
5. To wire your printer to the Director Series Unit, please follow the wiring diagram to the right.

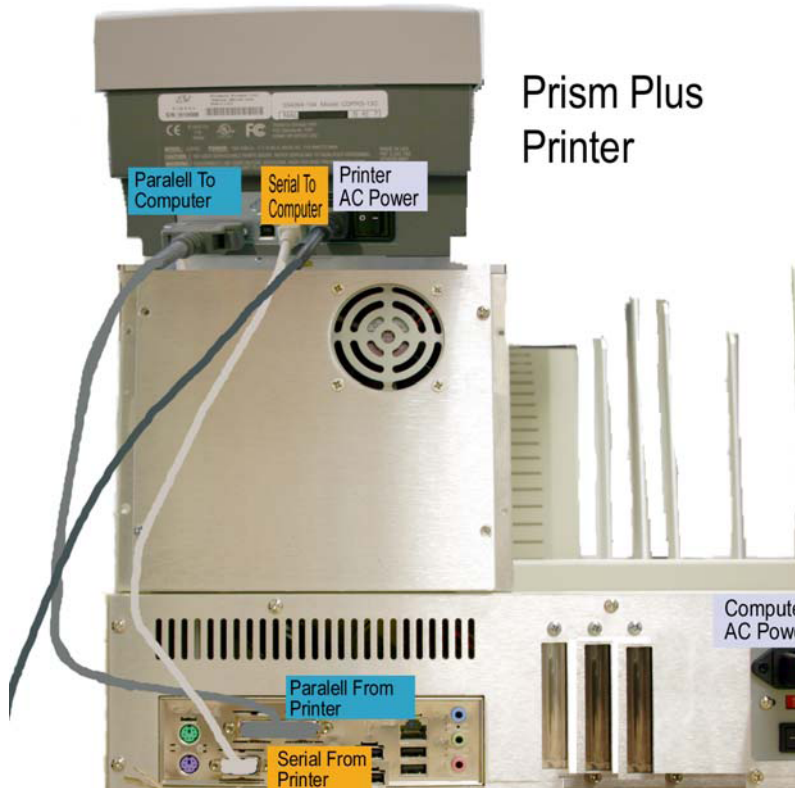

This page left blank intentionally.

This page left blank intentionally.